






Product Type: Standard intermediate relay

Product Name: RGT-24DC-2C

Product Description: Standard industrial relay, 2 transfer contact 24VDC/ 7A, Test button

Product Size

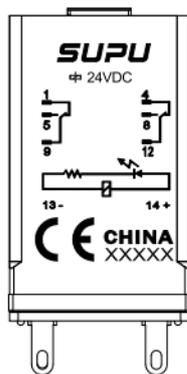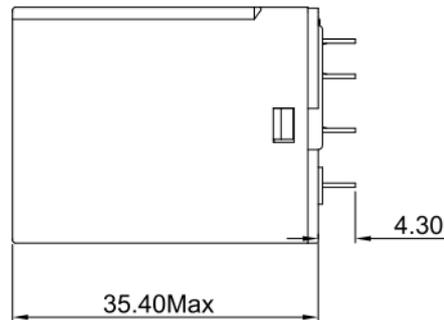

Parameters

| | |
|-----------------------------------|-------------|
| ⌘ SUPU ID | RGT-24DC-2C |
| ⌘ Protection Level | IP44 |
| ⌘ Ambient temperature (operation) | -25~+70°C |

| | |
|---------------------------------|--------------------|
| ☞ Ambient temperature (storage) | -40~+70°C |
| ☞ Mounting Type | optional |
| ☞ Connection method | push-in connection |

Technical data

| | |
|--------------------------------|--|
| ☞ IEC Rated Voltage | 24DC |
| ☞ Overvoltage category | II |
| ☞ Degree of pollution | 6 |
| ☞ Dielectric withstand voltage | 1500VAC 1min : Coils/ contacts 1000VAC 1min : BetweenContacts 1500VAC 1min : BetweenContacts |
| ☞ Endurance | Mechanical 10 million cycles or more Electrical more than 100,000 times |
| ☞ Operating voltage | ≤75% of rated voltage |
| ☞ Release Voltage | ≥10% of rated voltage |
| ☞ Maximum permissible voltage | 110% of rated voltage |
| ☞ Nominal power consumption | About0.9W~1.1W |
| ☞ Response time | 20ms or less |
| ☞ Release time | 15ms or less |
| ☞ Protective circuit | None |
| ☞ Status display | visual |
| ☞ Maximum switching power | 1750VA/210W |
| ☞ Rated load capacity | AC250V/7A DC30V/7A |
| ☞ Rated load current | 7A |
| ☞ Insulation resistance | 1000MΩ (500VDC) |

Commercial data

| | |
|--------------------------|-------------|
| ☞ Order No | RGT-24DC-2C |
| ☞ Packing unit | 20 |
| ☞ Minimum order quantity | 20 |
| ☞ Single piece weight | 35g |

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat