


Product Type: Push-in spring terminal

Product Name: TPD2.5-3-GY

Product Description: Connection method: Push in connection, IEC Rated Current: 22A, IEC Rated Voltage: 500V, Number of connections: 6, Number of levels : 2, Rated cross section: 28-12AWG

Product Size

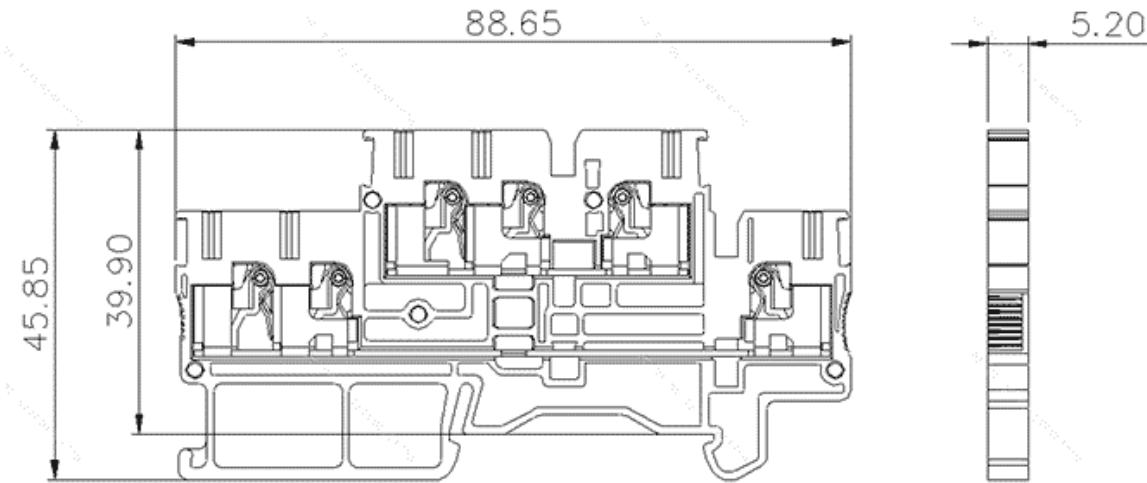

Parameters

| | |
|-------------------------|-------------|
| ☞ SUPU ID | TPD2.5-3-GY |
| ☞ Width | 5.2mm |
| ☞ Number of levels | 2 |
| ☞ Number of connections | 6 |

| | |
|--|--------------|
| ☞ Connection method | 直插弹簧接线 |
| ☞ Protection Level | IP20 |
| ☞ Insulation material | PA66 |
| ☞ Insulation material group | I |
| ☞ Contact material | Copper alloy |
| ☞ Contact plating | Sn,Plated |
| ☞ Ambient temperature (operation) | -40°C~105°C |
| ☞ Ambient temperature (assembly) | -5°C~70°C |
| ☞ Ambient temperature (storage) | -25°C~60°C |
| ☞ Permissible humidity (storage/transport) | 30%~70% |

Technical data

| | |
|---|------------------------|
| ☞ IEC Rated Current | 22A |
| ☞ IEC Rated Voltage | 500V |
| ☞ Overvoltage category | III |
| ☞ Degree of pollution | 3 |
| ☞ Rated impulse voltage | 6KV |
| ☞ UL Rated Current | 20A |
| ☞ UL Rated Voltage | 600V |
| ☞ Conductor cross section rigid | 0.2-4mm ² |
| ☞ Conductor cross section flexible | 0.2-2.5mm ² |
| ☞ Conductor cross section flexible,with ferrule | 0.2-2.5mm ² |
| ☞ Stripping length | 8-10mm |
| ☞ Use group | B/C |

Commercial data

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat