


Product Type: Push-in spring terminal

Product Name:TPIO1.5-S-3-PE

Product Description: Connection method:Push in connection,IEC Rated Current:13.5A,IEC Rated Voltage:250V,Number of connections:4,Number of levels : 1,Rated cross section:26-14AWG

Product Size

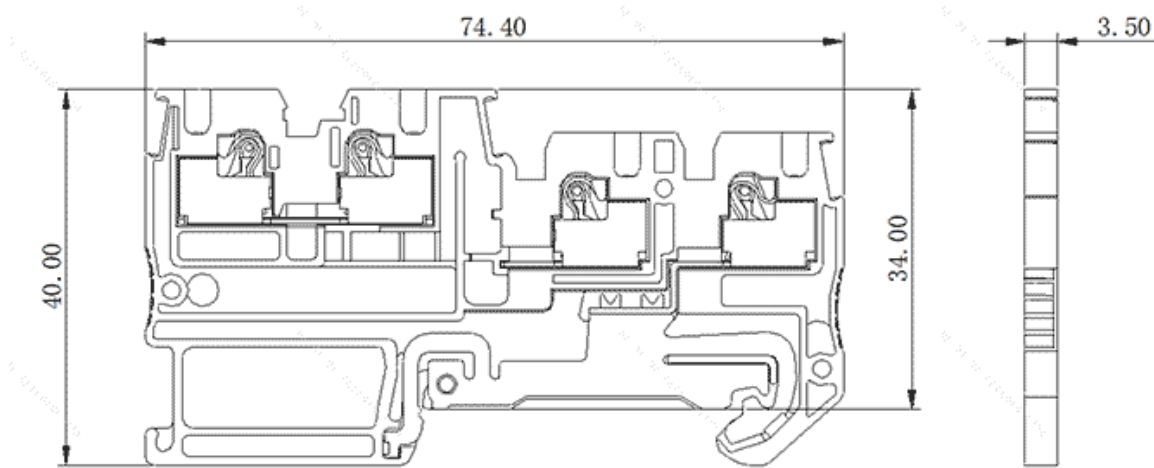

Parameters

| | |
|-------------------------|----------------|
| ☞ SUPU ID | TPIO1.5-S-3-PE |
| ☞ Width | 3.5mm |
| ☞ Number of levels | 1 |
| ☞ Number of connections | 4 |

| | |
|--|--------------|
| ☞ Connection method | 直插弹簧接线 |
| ☞ Protection Level | IP20 |
| ☞ Insulation material | PA66 |
| ☞ Insulation material group | I |
| ☞ Contact material | Copper alloy |
| ☞ Contact plating | Sn,Plated |
| ☞ Ambient temperature (operation) | -40°C~105°C |
| ☞ Ambient temperature (assembly) | -5°C~70°C |
| ☞ Ambient temperature (storage) | -25°C~60°C |
| ☞ Permissible humidity (storage/transport) | 30%~70% |

Technical data

| | |
|---|------------------------|
| ☞ IEC Rated Current | 13.5A |
| ☞ IEC Rated Voltage | 250V |
| ☞ Overvoltage category | III |
| ☞ Degree of pollution | 3 |
| ☞ Rated impulse voltage | 4KV |
| ☞ UL Rated Current | 15A/15A/10A |
| ☞ UL Rated Voltage | 300V |
| ☞ Conductor cross section rigid | 0.2-1.5mm ² |
| ☞ Conductor cross section flexible | 0.2-1.0mm ² |
| ☞ Conductor cross section flexible,with ferrule | 0.2-1.0mm ² |
| ☞ Stripping length | 8-10mm |
| ☞ Use group | B/C/D |

Commercial data

☞ Order No

TPIO1.5-S-3-PE

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat