




Product Type: Din rail power supply

**Product Name:SDD-24DC2-20**

Product Description: Dual channel 24V input, support 1+1 and N+1 redundancy system, output current up to 20A

Product Size

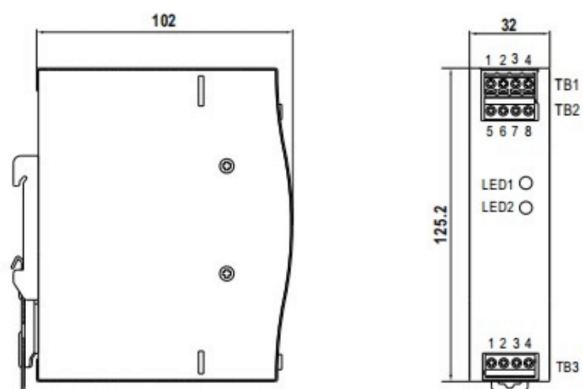

## Parameters

|                                                                                                                |              |
|----------------------------------------------------------------------------------------------------------------|--------------|
|  SUPU ID                     | SDD-24DC2-20 |
|  Protection Level            | IP20         |
|  Operating temperature range | -40~+80°C    |

|                  |                                |
|------------------|--------------------------------|
| ☞ Terminal block | MC-TD5.08H03C-0001 MC-5.08A04C |
| ☞ DC OK          | Yes                            |
| ☞ Dimensions(mm) | 125.2*32*102                   |

## Technical data

|                     |                           |
|---------------------|---------------------------|
| ☞ IEC Rated Current | 0-20A continue            |
| ☞ IEC Rated Voltage | DC : 24V                  |
| ☞ Nominal input     | DC                        |
| ☞ Efficiency        | 98%                       |
| ☞ Ripple noise      | ", "                      |
| ☞ Input frequency   | ",IP/OP-Housings:0.5KVac; |

## Commercial data

|                          |              |
|--------------------------|--------------|
| ☞ Order No               | SDD-24DC2-20 |
| ☞ Packing unit           | PCS          |
| ☞ Minimum order quantity | 1            |
| ☞ Single piece weight    | 0.35KG       |

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

---

Date:2026-03-14 05:56

The right to modify data belongs to SUPU.