




Product Type: IP67 connector


Product Name: ESF-RS200A50YB1-AQ

Product Description:

Product Size

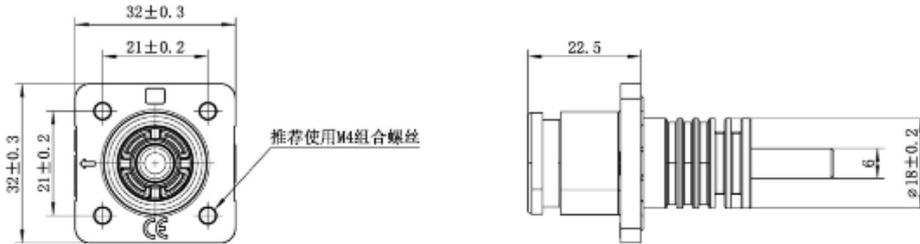

插座除键槽及类型标识不同外，其它结构均相同



| 订货号 | 物料名称 | 插座键槽 | coding | 备注 |
|--------------------|-----------------------|------|-----------------|----|
| ESF-RS200A50YB1 | ESF-RS200A50YB1 插座 | | 无 | 橙 |
| ESF-RS200A50BB1 | ESF-RS200A50BB1 插座 | | | 黑 |
| ESF-RS200A50YB1-AQ | ESF-RS200A50YB1-AQ 插座 | | A:20° Q:90° | 橙 |
| ESF-RS200A50BB1-AQ | ESF-RS200A50BB1-AQ 插座 | | | 黑 |
| ESF-RS200A50YB1-BS | ESF-RS200A50YB1-BS 插座 | | B:30° S:180° | 橙 |
| ESF-RS200A50BB1-BS | ESF-RS200A50BB1-BS 插座 | | | 黑 |

Parameters

☞ SUPU ID

ESF-RS200A50YB1-AQ

☞ Number of connections

1

☞ Connection method

Screw thread

☞ Protection Level

IP67

| | |
|-------------------------------|--------------|
| ⌘ Operating temperature range | -40°C~125°C |
| ⌘ Insulation material | PA |
| ⌘ Insulation material group | III |
| ⌘ Contact material | Copper alloy |
| ⌘ Contact plating | Ag,Plated |
| ⌘ Insertion/withdrawal cycles | 100 |
| ⌘ Insertion force | ≤75N |
| ⌘ Withdrawal force | ≥10N |

Technical data

| | |
|----------------------------|---|
| ⌘ IEC Rated Current | 200A |
| ⌘ IEC Rated Voltage | 1500V |
| ⌘ Overvoltage category | III |
| ⌘ Degree of pollution | 3 |
| ⌘ Rated impulse voltage | 12.3KV |
| ⌘ UL Rated Current | 50mm ² (AWG1/0) |
| ⌘ UL Rated Voltage | Positive |
| ⌘ Stripping length | / |
| ⌘ Rated cross section | 50mm ² (AWG1/0) |
| ⌘ Rated cross section(AWG) | 50mm ² (AWG1/0) 35mm ² (AWG2) |
| ⌘ External cable diameter | / |

Commercial data

| | |
|------------|--------------------|
| ⌘ Order No | ESF-RS200A50YB1-AQ |
|------------|--------------------|

| | |
|---------------------------------------|---------|
| ☞ Packing unit | 1 |
| ☞ Minimum order quantity | PCS |
| ☞ Weight per unit (without packaging) | 0.047KG |
| ☞ Single piece weight | 0.045KG |

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat