


Product Type: M8 Field-assembly Connector

Product Name:M8A04Z- MASSTSA



Product Description: M8 assembly welded type, straight male 4-core, shielded, the diameter of the adapter wire is 3.5-5.0MM

Product Size

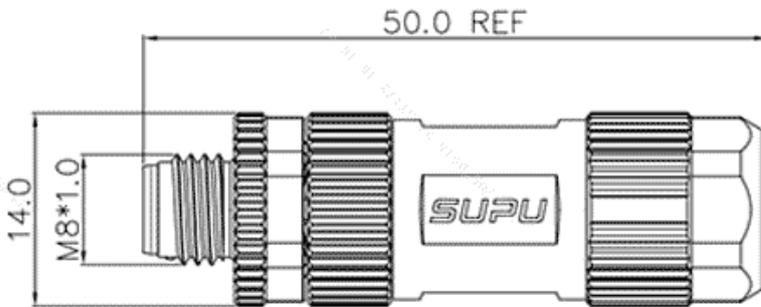

Parameters

| | |
|-------------------------|-------------|
| ☞ SUPU ID | M8 |
| ☞ Number of connections | 4 |
| ☞ Connection method | Solder Type |
| ☞ Cable OD. | 3.5-5.0mm |

| | |
|-------------------------------|-------------------|
| ☞ Protection Level | IP67 |
| ☞ Operating temperature range | -40~+85°C |
| ☞ Mounting Type | Field |
| ☞ Thread type | M8X1.0 |
| ☞ Category | Male |
| ☞ Product type | assembly,straight |
| ☞ Coding | A |
| ☞ Connection method | Solder Type |
| ☞ Shielded | YES |
| ☞ Mechanical endurance | ≥100 |
| ☞ Standards | IEC61076-2-104 |

Technical data

| | |
|----------------------------|-----------------|
| ☞ IEC Rated Current | 3A |
| ☞ IEC Rated Voltage | 50 VAC / 60 VDC |
| ☞ Degree of pollution | 3 |
| ☞ Insulation Resistance | ≥100MΩ |
| ☞ Contact resistance | <10mΩ |
| ☞ Contact/surface material | CuSn/Ni/Au |
| ☞ Contact carrier material | PA |
| ☞ Screw/nut material | CuZn |
| ☞ Sealing material | NBR |

Commercial data

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat