




Product Type: Fixed terminal

Product Name:MC-  
TEH5.08H12C-0001

Product Description: Pitch:5.08mm Rated  
Voltage : 320V Rated Current:20A Connection  
method : Screw connection colour : customizable

### Product Size

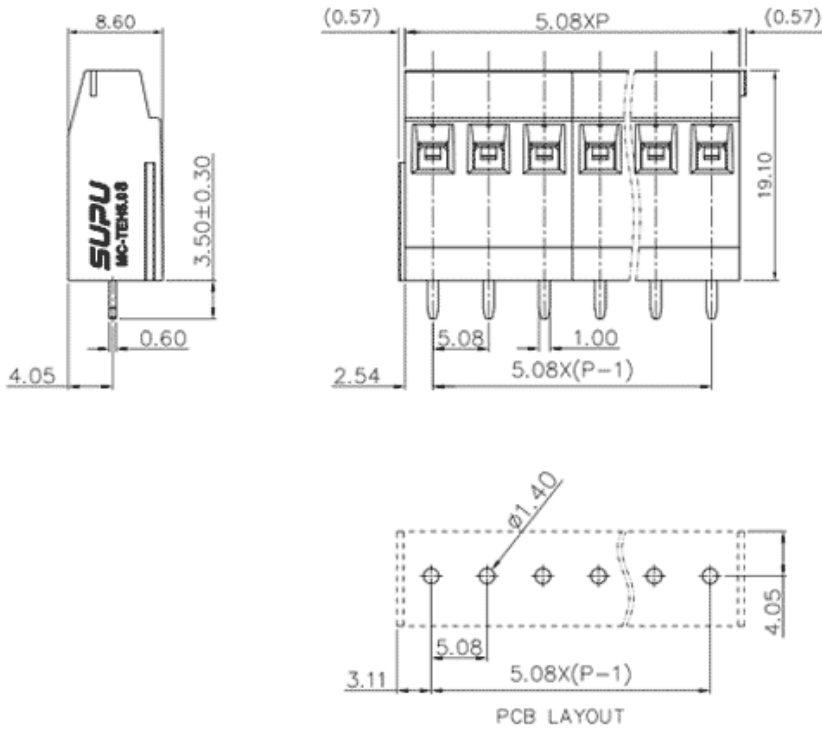

### Parameters

☞ SUPU ID	MC-TEH5.08H12C-0001
☞ Pitch	5.08
☞ Number of levels	Single layer
☞ Number of connections	12

Connection method	Screw connection
Protection Level	IP20
Operating temperature range	-40~+105°C
Insulation material	PA66
Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn,Plated
Color	Green/Black/Blue/Grey/Orange/Red

## Technical data

IEC Rated Current	20A
IEC Rated Voltage	320V
Overvoltage category	III/III/ II
Degree of pollution	3 2 2
Rated impulse voltage	4.0KV 4.0KV 4.0KV
UL Rated Current	12A - 10A
UL Rated Voltage	300V - 300V
Conductor cross section rigid	0.2~1.5mm <sup>2</sup>
Conductor cross section flexible	0.2~1.5mm <sup>2</sup>
Conductor cross section flexible,with furrule	0.2~1.0mm <sup>2</sup>
Locking screw Specification	M3
Locking screw torque	0.5N.m
Fixed Screw Specification	-
Stripping length	6-7mm

☞ Order No

MC-TEH5.08H12C-0001

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat