


Product Type: Plug-in terminal-Plug

Product Name:MC-ROX7.5H10P-0001

Product Description: Pitch:7.5mm Rated Voltage : 630V Rated Current:15A Connection method : Spring cage connection colour : customizable

### Product Size

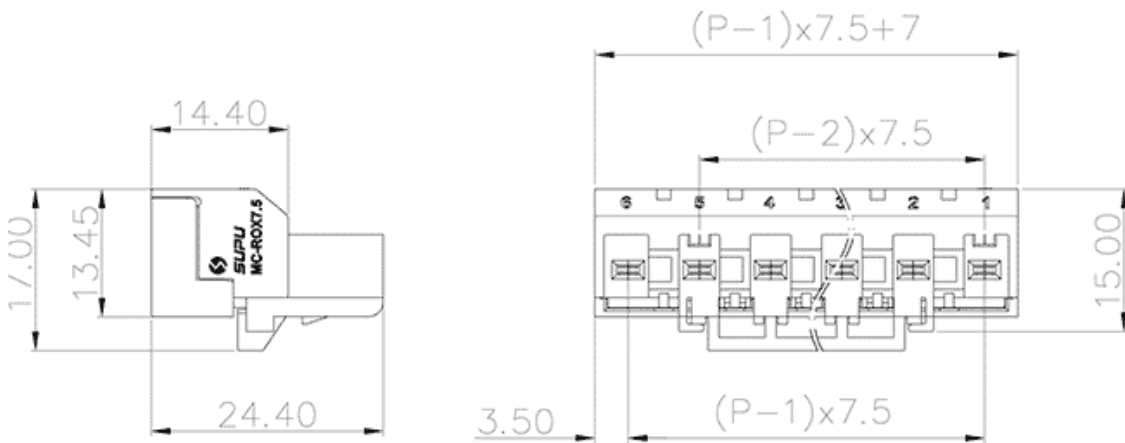

### Parameters

⌘ SUPU ID	MC-ROX7.5H10P-0001
⌘ Pitch	7.5
⌘ Number of levels	single layer
⌘ Number of connections	10

☞ Connection method	Spring cage connection
☞ Protection Level	IP20
☞ Operating temperature range	-40~+105°C
☞ Insulation material	PBT
☞ Insulation material group	IIIa
☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated gold
☞ Color	Green/Black/Blue/Grey/Orange/Red

## Technical data

☞ IEC Rated Current	15A
☞ IEC Rated Voltage	630V
☞ Overvoltage category	III/III/ II
☞ Degree of pollution	3 2 2
☞ Rated impulse voltage	6.0KV6.0KV6.0KV
☞ UL Rated Current	15A 15A 15A
☞ UL Rated Voltage	300V 300V 300V
☞ Conductor cross section rigid	0.2-2.5mm <sup>2</sup>
☞ Conductor cross section flexible	0.2-2.5mm <sup>2</sup>
☞ Conductor cross section flexible,with ferrule	0.2-2.5mm <sup>2</sup>
☞ Locking screw Specification	-
☞ Locking screw torque	-
☞ Fixed Screw Specification	-
☞ 固定螺钉扭矩	-

☞ Stripping length	9-10mm
☞ Use group	B/C/D
☞ Rated cross section	24~12AWG

## Commercial data

☞ Order No	MC-ROX7.5H10P-0001
------------	--------------------

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat