




Product Type: Din rail power supply

Product Name:SDP2-1AC24-480

Product Description: Single phase full range,
24V/480W, DC OK remote monitoring, DIN 35 rail
mounting

Product Size

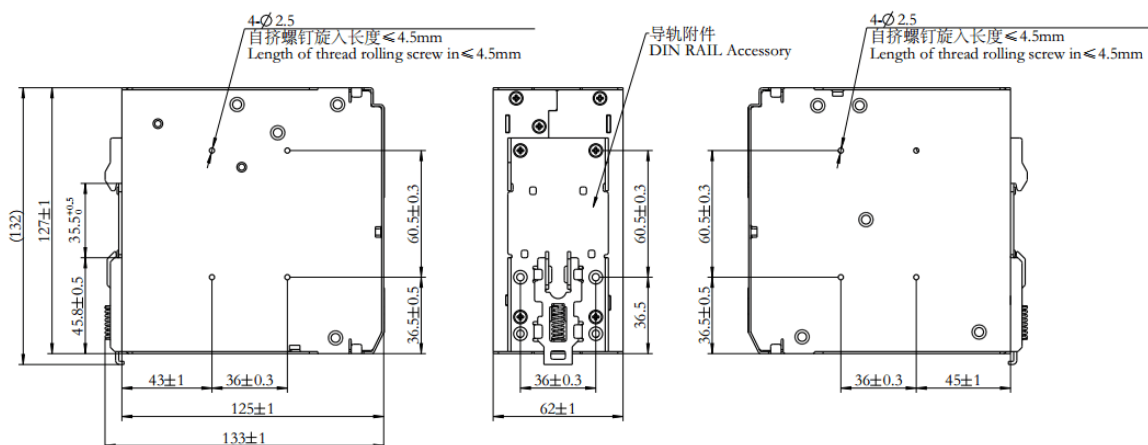

Parameters

⌘ SUPU ID	SDP2-1AC24-480
⌘ Protection Level	IP20
⌘ Operating temperature range	-40~+70°C
⌘ Terminal block	MC-TC5.0H2P-BK MC-TC5.0H3P-BK-0001-RZ MC-TC7.5H04P
⌘ DC OK	Yes
⌘ Dimensions(mm)	127 * 125* 62

Technical data

⌘ IEC Rated Current	5.5A
⌘ IEC Rated Voltage	AC:264V DC:370V
⌘ Nominal input	AC、DC
⌘ Efficiency	93%
⌘ Ripple noise	120mVp-p
⌘ Input frequency	63HZ
⌘ Peak load capacity	150%
⌘ Withstand voltage	I/P-O/P : 3000Vac.60S,≤10mA I/P- PE : 1500Vac.60S,≤10mA O/P- PE : 700VDC.60S,≤10mA
⌘ Working altitude	≤3000m

Commercial data

⌘ Order No	SDP2-1AC24-480
⌘ Packing unit	PCS
⌘ Minimum order quantity	1
⌘ Single piece weight	1.2KG

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2026-03-12 00:30

The right to modify data belongs to SUPU.